

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 February 2005 (10.02.2005)

PCT

(10) International Publication Number  
**WO 2005/013333 A3**

(51) International Patent Classification<sup>7</sup>: **F01N 3/10**,  
B01D 50/00, 53/34

[US/US]; 254 Castle Blvd., Akron, OH 44313 (US). LEX,  
Henry [US/US]; 700 Island Way, #1004, Clearwater, FL  
33767 (US).

(21) International Application Number:  
PCT/US2004/024688

(74) Agent: MOXON, George, W., II; Roetzel & Andress, 222  
South Main Street, Akron, OH 44308 (US).

(22) International Filing Date: 30 July 2004 (30.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/492,173 1 August 2003 (01.08.2003) US

(71) Applicant (for all designated States except US): LEXCO,  
INC. [US/US]; 163 N. Hayden Pkwy, Hudson, OH 44236  
(US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): LEX, David

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: MONOLITH FOR USE IN REGENERATIVE OXIDIZER SYSTEMS

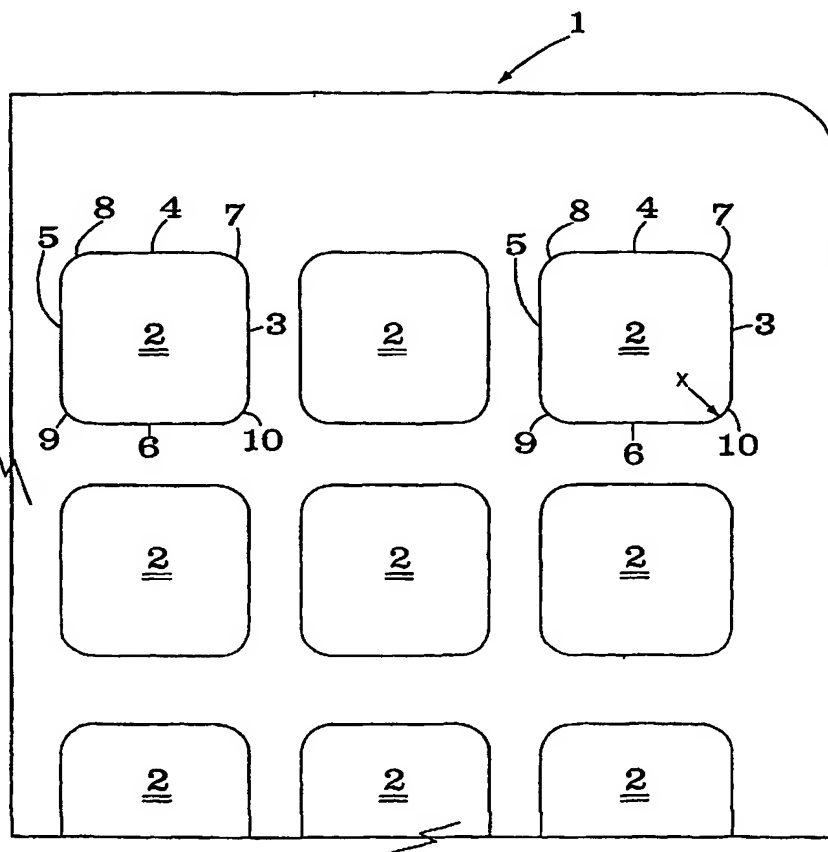

(57) Abstract: A ceramic packing element comprising a monolith structure having a generally block shape and having plurality of equally spaced parallel openings therein extending the length of the block where the openings have generally straight sides and corners which are rounded. The corners are substantially radiused to produce the rounded corners. For example, where the openings in the element are between 1.8 and 6.5 mm, the radius will be between 0.3 and 1.8 mm. The block element will have between 20 to 60 cells by 20 to 60 cells totaling between 400 to 3600 cell elements.

WO 2005/013333 A3



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(88) Date of publication of the international search report:**

15 September 2005

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*